

TEN Solution Insulated wall protection panel 800X1200mm

Conform
to DTU
24.1

The insulated wall protection panel protects the device heat radiation and allows to reduce the safety distance between the flue connection pipes and the wall. Also decorative, it is possible to customize the interior with a choice of colors and pictures.

Solid models



**Black
sandblasted**



**Brown
sandblasted**



**Rust
sandblasted**

Models with patterns



Flame



Square


Safety distance

Reminder

According to the standard, the safety distance to respect between a single wall connecting duct and a combustible material is of 3 times the nominal diameter of the duct with a minimum of 37,5cm.

The insulated wall protection panels TEN allows to reduce the safety distance up to 1.5 times the diameter of the duct with a minimum of 20cm*

*(According to standard NF DTU 24.1).

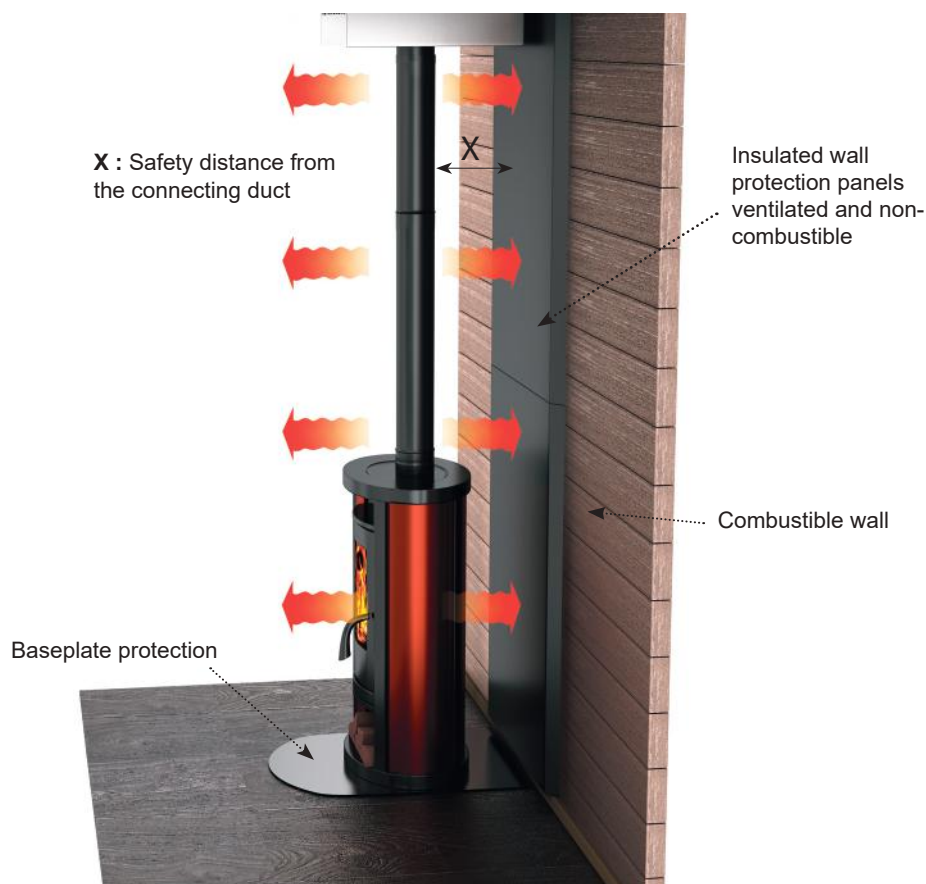

Dimensions

